



GREEN LINE

- Non-electric - Operates with water pressure
- Accurate dosage, even and continuous
- Improves yield and limits leaching due to small but frequent additions of nutrients
- Suitable for new generations of products: oils, wetting agents, etc.
- Saves water, product and labour
- Option of automated operation
- Portable Kit

- Fertigation
- Crop protection treatments
- pH adjustment
- Fumigation
- Disinfection
- Flower preservation
- Post-harvest treatments
- Etc.



D3GL	Dosage		Operating flow range min. - max.		Operating pressure		Version	
	%	Ratio	(l/h)	[US Pint/min - US GPM]	bar	PSI	Serial	Option
D3GL3000	0.03 - 0.3	[1:3000 - 1:333]	10 - 3 000	[1/3 - 14]	0.30 - 6	4.3 - 85		
D3GL2	0.2 - 2	[1:500 - 1:50]	10 - 3 000	[1/3 - 14]	0.30 - 6	4.3 - 85		
D3GL5	0.5 - 5	[1:200 - 1:20]	10 - 3 000	[1/3 - 14]	0.30 - 6	4.3 - 85		
D3GL10	1 - 10	[1:100 - 1:10]	10 - 3 000	[1/3 - 14]	0.50 - 6	7 - 85		

Connexion (NPT/BSP M) Ø 20 x 27mm [3/4"]

D8GL	Dosage		Operating flow range min. - max.		Operating pressure		Version	
	%	Ratio	(l/h)	[US Pint/min - US GPM]	bar	PSI	Serial	Option
D8GL2	0.2 - 2	[1:500 - 1:50]	500 - 8 000	[2.2 - 40]	0.15 - 8	2 - 116		

Connexion (NPT/BSP M) Ø 40 x 49mm [1" 1/2 M]

D20GL	Dosage		Operating flow range min. - max.		Operating pressure		Version	
	%	Ratio	(m³/h)	[US Pint/min - US GPM]	bar	PSI	Serial	Option
D20GL2	0.2 - 2	[1:500 - 1:50]	1 - 20	[5 - 100]	0.12 - 10	2 - 120		

Connexion (NPT/BSP M) Ø 50 x 60mm [2" / 1"]

D30GL	Dosage		Operating flow range min. - max.		Operating pressure		Version	
	%	Ratio	(m³/h)	[US Pint/min - US GPM]	bar	PSI	Serial	Option
D30GL02	0.02 - 0.2	[1 : 5000 - 1 : 500]	8 - 30	[40 - 140]	0.5 - 6	7.25 - 87		
D30GL1	0.1 - 1	[1 : 1000 - 1 : 100]	8 - 30	[40 - 140]	0.5 - 6	7.25 - 87		

Connexion (BSP) Ø 80 x 90mm [3"M] - 2 flanges DN80 ISO

Available options

- PVDF : Carter for highly concentrated acids
- AF : Recommended seals for alkaline concentrate
- VF : Recommended seals for acids, oils, odour or pest- control concentrates
- K : Recommended seals for highly concentrated acids (>15%)
- H : Hastelloy plunger rod
- V : Kit for viscous additives recommended for more than 200 or 400 cPs (depending on model)
- Injection hose: Special material for hose and foot strainer available
- B.P. : (Integrated by-pass) system for manual activation of the additive suction (on) and stop (off)
- Support legs
- EC : Sonde EC


DOSATRON Technology

Dosatron technology is based on a hydraulic motor pump activated only by pressure and the flow of the water.

The hydraulic motor

The motor piston moves under the pressure of the water. A system of valves allows the movement to be reversed.

The dosing pump is called a VOLUMETRIC pump.

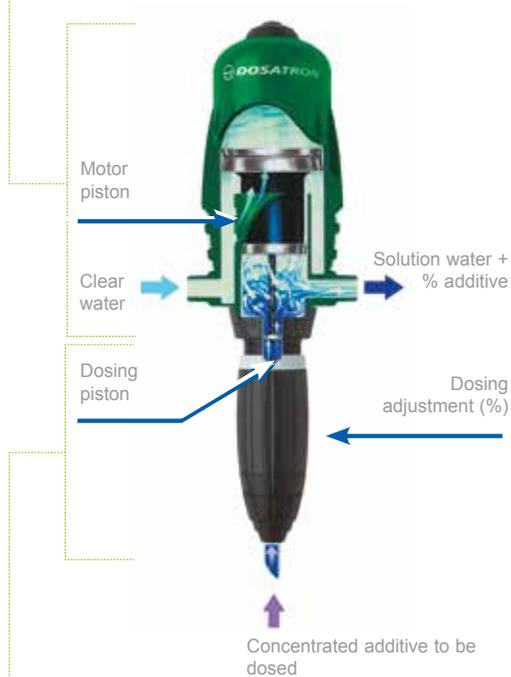

The dosing assembly

The Dosing piston driven by the motor continuously injects a fixed volume of product (adjustable capacity of the dosing body). The dosing piston will inject the quantity of product that corresponds to the volume of water passing through the motor. Therefore, the operating principle ensures constant dosing, independently of the variations in flow rate and pressure of the water.

The injection of the product is **PROPORTIONAL** to the water flow rate.

■ Dosing of any additive as liquid or soluble in water

■ Multiple applications, one solution


■ High accuracy dosing

EN



DOSATRON®

Because life is powered by water ■ ■ ■ ■ ■ ■ ■ ■ ■ ■

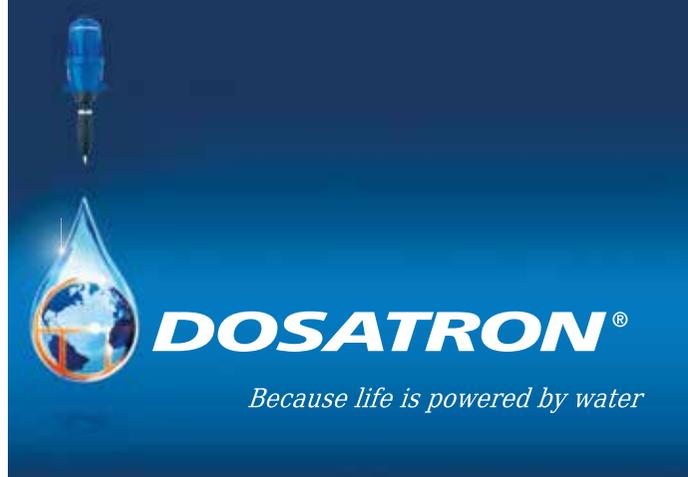

Customer service

To download
DOSATRON
app



App Store

Google play

GREEN LINE

DOSATRON INTERNATIONAL S.A.S.

Rue Pascal - B.P. 6 - 33370 TRESSSES (BORDEAUX) - FRANCE
Tel. 33 (0)5 57 97 11 11 - Fax. 33 (0)5 57 97 11 29 / 33 (0)5 57 97 10 85
e.mail : info@dosatron.com - <http://www.dosatron.com>

This document does not form a contractual engagement on the part of Dosatron International and is for information only. Dosatron International reserves the right to alter product specification or appearance without prior notice.
© DOSATRON INTERNATIONAL S.A.S. 2015

DOCDEPGAMMELEIN-07/15

