



# irriGREY Filter

For greywater diversion device reuse applications

- Suitable with Netafim Bioline (Tiran) dripperline from a domestic greywater diversion device (GWDD)



## Features

- Unique 3 dimensional filter element to collect lint and hair from greywater while ensuring minimum cleaning required
- Easy process to clean or replace element
- Designed to be installed downstream of the GWDD
- Filter comes with filter bracket to mount on wall and spanner for opening housing to clean/ replace element
- Recommended to install Netafim DNL Valve upstream of filter as a quick relief valve to stop back pressure on pump if filter blocks.




## Specifications

- 20mm Female inlet and outlet
- Maximum pressure 5 Bar
- Flow rate range from 600 to 6,000l/hr
- Dimensions: 320mm long x 140mm diameter
- Polypropylene housing, EDPM seal and polyurethane filter element
- UV resistant
- irriGREY Filter supplied with one element pre-installed
- Additional elements are available in either single pack (part #00060-004600) or 4 pack (part #00060-004700 )



# irriGREY Filter

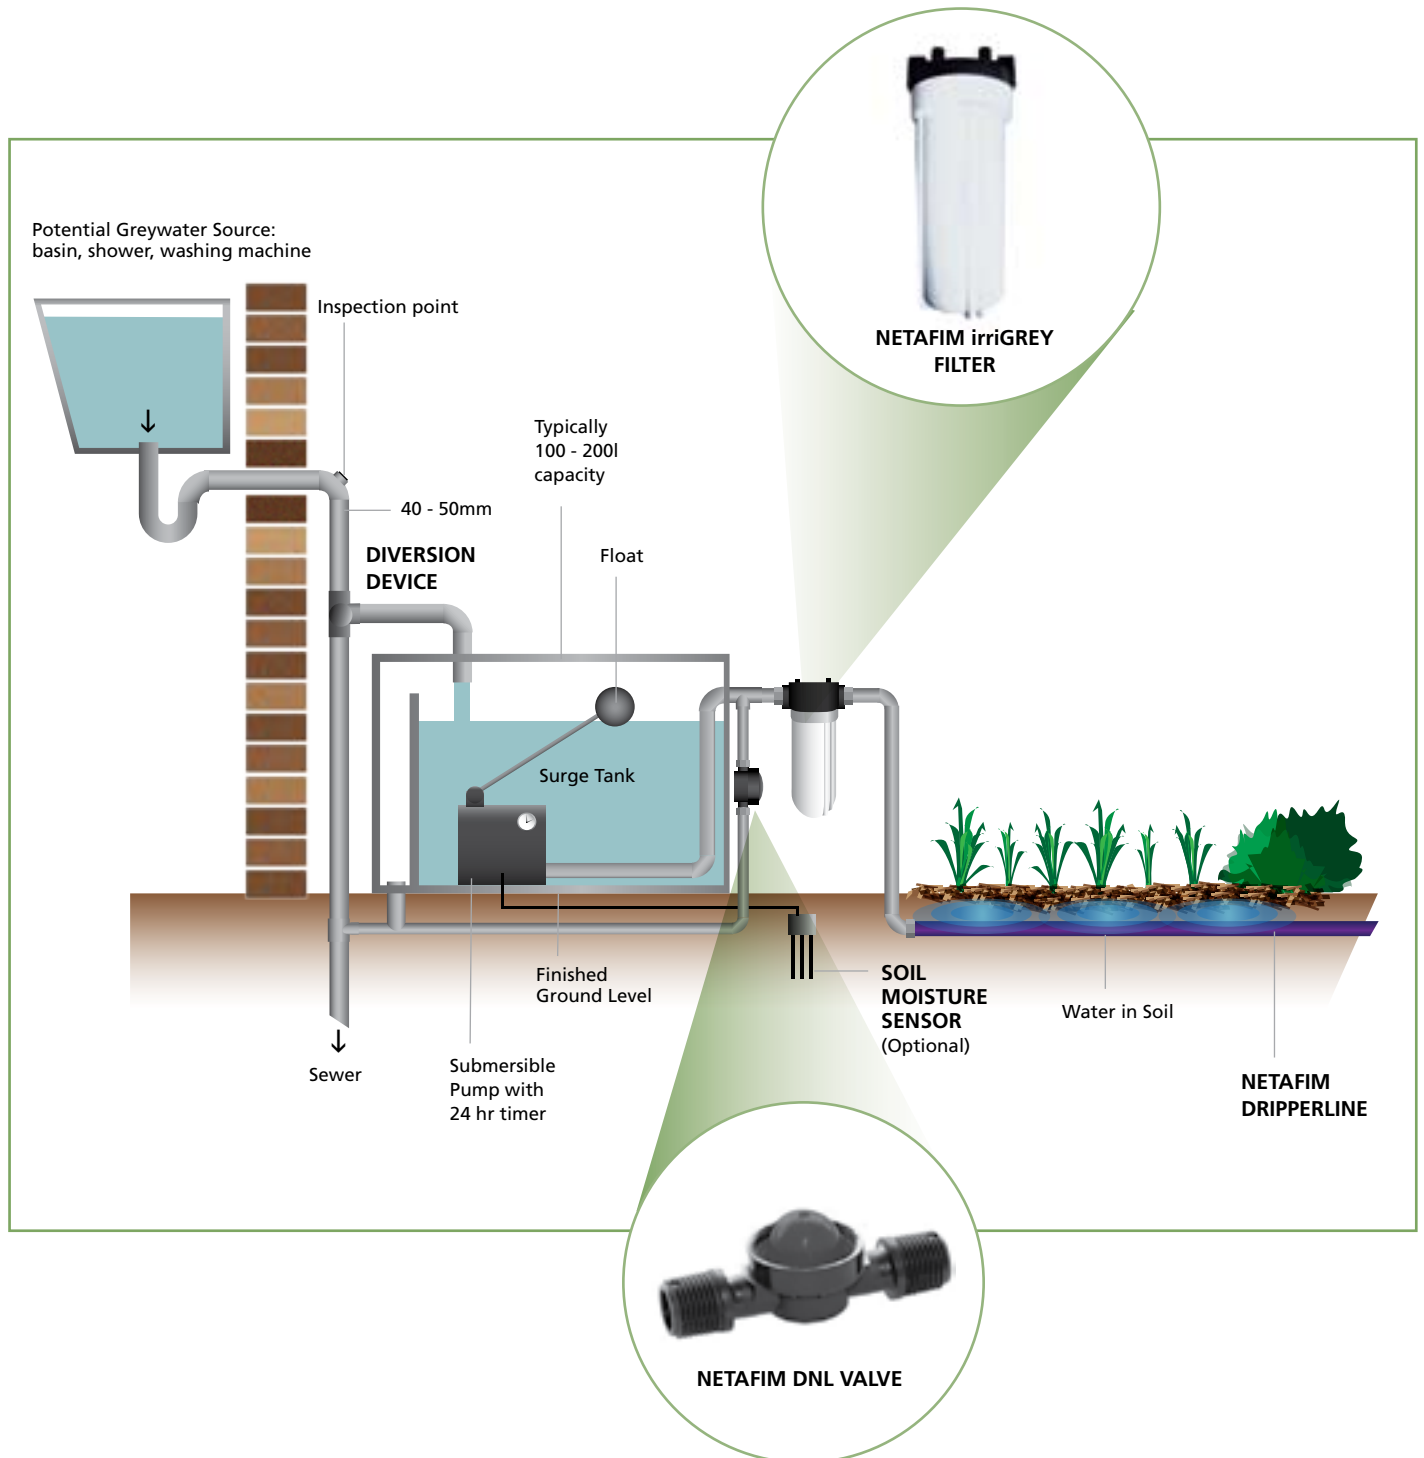

## Contact Details

**Netafim Australia,**  
213-217 Fitzgerald Rd,  
Laverton, VIC, 3028

t. (03) 8331 6500  
f. (03) 9369-3865

netinfo@netafim.com.au  
www.netafim.com.au

**Netafim New Zealand**  
Airport Mail Centre  
Manukau City 2150

t. (09) 256 2551  
f. (09) 256 2552

www.netafim.co.nz

